


Swing Check Valve

BH-22 (B120G)



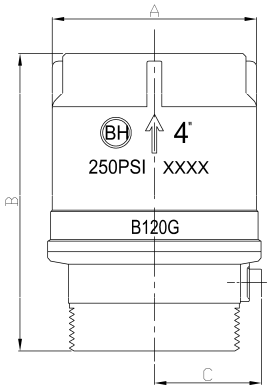

For sprinkler and standpipe systems.

Available with the following thread:

BH-22A : Male NPT inlet and Female NPT outlet

BH-22B : Male NPT inlet and Groove outlet

BH-22C : Groove inlet and outlet

REMARK:THREADED BS 21 or ANSI B1.20.1

GROOVED TO ANSI/AWWA C606-87

Optional Finishes:RB-Rough Brass PC-Polished Chrome Plated

UL AND FM APPROVED

BRASS ASTM C85700

WORKING PRESSURE

2" ,2½", 3" 250PSI

4" 175PSI


c UL us LISTED 75BM FM APPROVED

TYPE	CERTIFI-	SIZE	A (mm)	B (mm)	C (mm)
BH-22A MNPT(a) xFNPT(b)	-	2"	80	127	45
	FM	2½"	103	153	54
	-	3"	118	188	57
	UL	4"	138	202	76
BH-22B MNPT(a) xG(b)	-	2"	80	144	45
	FM	2½"	103	164	54
	-	3"	118	194	57
	UL	4"	138	208	76
BH-22C G(a)xG(b)	-	2"	80	144	45
	FM	2½"	103	164	54
	-	3"	118	194	57
	UL FM	4"	138	202	76

Adjustable Pressure Relief Valve

BH-60



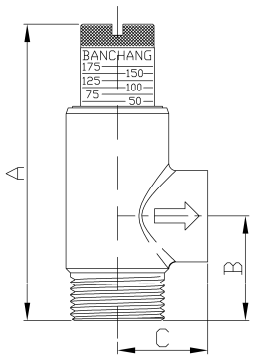

ADJUSTABLE PRESSURE RELIEF VALVE

Used in grid type and residential sprinkler systems or when pressure relief is required. Adjustable from 25 to 175 PSI.

Standard equipment:

Male IPS inlet and female IPS outlet cast bronze valve.

Optional Finishes:

RB-Rough Brass

IPS Inlets (a)	IPS Outlet (b)
½" MNPT	½" FNPT
¾"MNPT	¾"FNPT

(mm)	½"	¾"
A	86	86
B	32	32
C	25	25