FPPI
An ASC Engineered Solution

Angle Globe Valve, Brass UL/ULc Listed 300PSI

Manufactured from cast brass*, our angle valves are for Trim or Drain applications and are designed to be suitable for all sprinkler systems including high pressure sprinkler systems. The soft seat design utilizes NBR Nancar N70 material or PTFE for positive sealing to 300 psi. The most common use for the 2" IPS size is as a system drain at the riser. May be used on both alarm valve and shotgun type riser assemblies.

Materials


- Cast Brass*: Body, Bonnet
- Brass* ASTM B16: Gland, Holder, Stem, Washer
- Stainless Steel: Nut
- NBR Nancar N70: Rubber seat
- JIS FC20: Hand wheel

*Contains lead. Not for use in water systems intended for human consumption.



06-824-00

c UL us LISTED

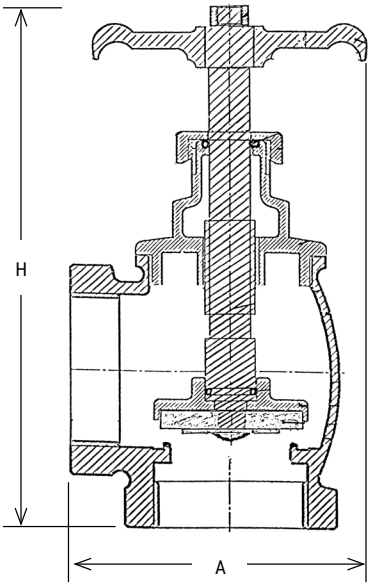



06-822-00



06-826-00



06-280-00



06-830-00

Part No.	Description	Size	A		H		Pack Qty.
		in	in	mm	in	mm	
06-820-00	Angle Valve	½	1.75	44.5	4.60	116.8	8
06-822-00	Angle Valve	¾	2.00	50.8	4.88	123.9	5
06-824-00	Angle Valve	1	2.50	63.5	5.85	148.6	5
06-826-00	Angle Valve	1¼	3.00	76.2	6.45	163.8	4
06-828-00	Angle Valve	1½	3.50	88.9	7.50	190.5	4
06-830-00	Angle Valve	2	4.00	101.6	8.25	209.6	2