
Location: _____

MIFAB® F1600-C — ISOLATION FLOOR DRAIN WITH ADJUSTABLE STRAINER

Specification: MIFAB® Series F1600-C lacquered cast iron floor drain with upper and lower bodies and anchor flanges, cast iron membrane clamp rings with primary and secondary weepholes for waterproofing membrane, neoprene expansion compensator, and standard reinforced (specify diameter) satin finished (specify material finish) ADA compliant, heel proof strainer with 1/4" wide slots.

Function: Used in computer rooms, data centers, industrial laboratories and other membrane finished areas where cables and wiring are located in the sub floor. The flexible flooring requires the drain to have a bottom outlet connected to the waste piping and a top strainer level with the finished floor. The neoprene expansion compensator that connects the two will flex with the floor. Membrane clamp is provided to secure the waterproofing membrane.

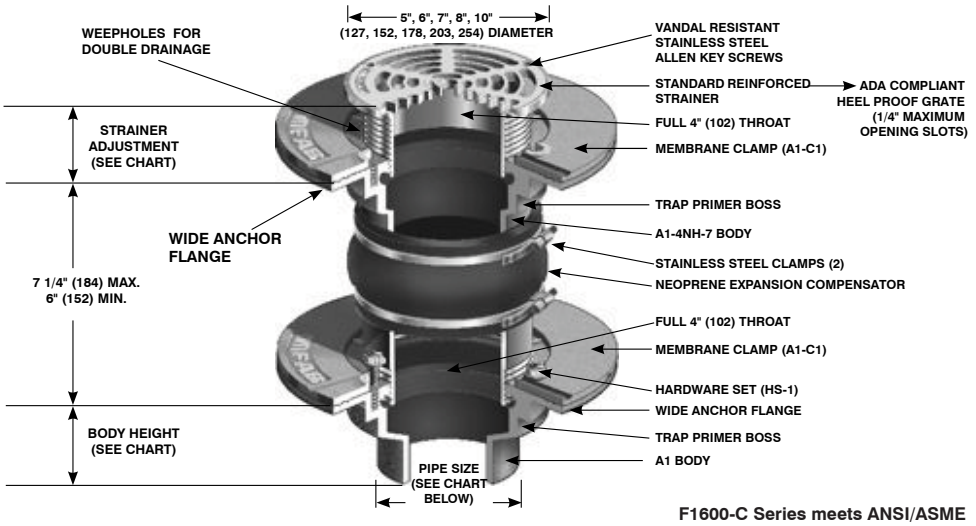

Metric equivalents see chart below. (Dimension) Denotes Millimetres

F1600-C Series meets ANSI/ASME floor drain standard A112.6.3-2001

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING				PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING N.B. (-1) Lbs.	LOAD RATING S.S. (-3) Lbs.	LOAD RATING D.I. (-4) Lbs.		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
○ 5" (127)	1 9/16" (40)	2 11/16" (68)	8 in² (5200²)	Up To 2,000	5000 to 7499	Up To 7,499	○ 2" (51)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 1/4" (57)	☐ 3 3/4" (95)	☐ 2 15/16" (75)
○ 6" (152)	1 11/16" (43)	2 5/8" (67)	9 in² (5800²)	Up To 2,000	5000 to 7499	-	○ 3" (76)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 3/4" (95)
○ 7"(178)	1 1/2" (38)	2 5/8" (67)	12 in² (7700²)	Up To 2,000	5000 to 7499	-	○ 4" (102)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 3/4" (95)
○ 8"(203)	1 7/8" (48)	2 3/4" (70)	18 in² (16000²)	Up To 2,000	5000 to 7499	Over 10000	○ 5" (127)	☐ 3" (76)	--	☐ 2 5/8" (67)	☐ 3 3/4" (95)	--
○ 10"(254)	1 1/16" (17)	2 1/4" (57)	26 in² (17170²)	Up To 2,000	5000 to 7499	-	○ 6" (152)	☐ 3 1/4" (83)	☐ 6 1/2" (165)	--	--	--

	SUFFIX	OPTIONAL VARIATIONS
☐	-1	Nickel bronze strainer (veneer)
☐	-3	Stainless steel strainer (veneer)
☐	-4	Ductile iron strainer
☐	-5	Sediment bucket
☐	-6	Security screws (T-20 Torx & pin)
☐	-7	1/2" trap seal primer connection
☐	-8	Backwater valve (2", 3", 4")
☐	-11	Acid resistant epoxy coated body
☐	-13	Galvanized body
☐	-15	Extension
☐	-16	Square top
☐	-21	Secondary flat stainless steel strainer (2", 3", 4")
☐	-28	Stainless steel body (Type 304)
☐	-30	PVC socket connection body
☐	-31	ABS socket connection body
☐	-32	2", 3", 4" integral deep seal trap
☐	-34	Closure plug
☐	-40	Underdeck clamp

☐	-41	Sump receiver
☐	-50	Lacquered cast iron funnel
☐	-90	Threaded side outlet (2", 3", 4")
☐	-90NH	No hub side outlet (2", 3", 4")
☐	-95	Client logo
☐	-BA	Buy American Act compliant product
☐	-C2	High rough-in membrane clamp (min. 1 9/16" (40)
☐	-F4	4" Round funnel
☐	-F6	6" Round funnel
☐	-G	Oval 4" x 9" funnel
☐	-J	6" x 3" x 1" funnel
☐	(Standard)	No hub outlet
☐	-MG	MI-GARD Floor Drain Trap Sealer (2", 3" or 4")
☐	P	Push on outlet
☐	-PSA	Pennsylvania Steel Act compliant product
☐	T	Threaded outlet (2", 3", 4")
☐	X	Inside caulk outlet
☐	-Z	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____