
BAND HANGERS

www.phd-mfg.com

SWIVEL RING HANGER — FIG. 151 & 151F

Function: Designed for the suspension of non-insulated stationary pipe lines. The knurled insert nut, allows for vertical adjustment after installation. Fig. 151F has a layer of felt which separates the pipe from the hanger to reduce vibration and sound.
Material: Carbon steel
Finish: Pre-galvanized **(Fig. 151)** or pre-galvanized with felt lining **(Fig. 151F)**
Approvals: Underwriters' Laboratories Listed in the U.S. (UL) and Canada (CUL), and Factory Mutual Approved for all sizes. Complies with Federal Specification A-A-1192A (Type 10), and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69.
Ordering: Specify figure number and pipe size.

NOTE: If ordering Fig. 151F felt lined hangers for pipe sizes of 3 1/2" (90mm) or under, order the next largest size to allow for the thickness of the felt lining.

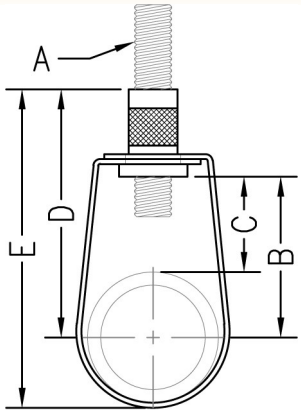


c UL us LISTED FM APPROVED

Pipe Size		Rod Size	B		Adj. C		D		E		Max. Rec. Load		Wt. Each	
											lbs.	kN	lbs.	kg
2 1/2	(65)	1/2	2 3/4	(69.85)	1 1/4	(31.75)	3 11/16	(93.66)	5 1/8	(130.18)	600	(2.67)	.33	(.15)
3	(80)	1/2	3 1/8	(79.38)	1 1/8	(28.58)	4	(101.60)	5 7/8	(149.23)	600	(2.67)	.35	(.16)
3 1/2	(90)	1/2	3 5/8	(92.08)	1 1/2	(38.10)	4 5/16	(109.54)	6 5/8	(168.28)	600	(2.67)	.37	(.17)
4	(100)	5/8	3 7/8	(98.43)	1 1/4	(31.75)	4 15/16	(125.41)	7 1/8	(180.98)	1000	(4.45)	.48	(.22)
5	(125)	5/8	3 3/8	(85.73)	1 3/8	(34.93)	5 5/8	(142.88)	8 1/2	(215.90)	1000	(4.45)	.57	(.26)
6	(150)	3/4	5 5/16	(134.94)	2	(50.80)	6 11/16	(169.86)	10 1/8	(257.18)	1250	(5.56)	1.06	(.48)
8	(200)	3/4	6 15/16	(176.21)	2 5/8	(66.68)	8 5/16	(211.14)	12 7/8	(327.03)	1250	(5.56)	1.32	(.60)

COPPER TUBING SWIVEL RING HANGER — FIG. 152 & 154

Function: Designed for the suspension of non-insulated stationary copper tubing. The knurled insert allows for vertical adjustment after installation. The PVC coating on Fig. 154 protects the tubing from contact with the metal surface of the hanger.
Material: Carbon steel
Finish: Copper color epoxy **(Fig. 152)** Copper color epoxy with PVC coating **(Fig. 154)**
Approvals: Complies with Federal Specification A-A-1192A (Type 10) and Manufacturers' Standardization Society ANSI/MSS SP-58 (Type 10) which supersedes ANSI/MSS SP-69.
Ordering: Specify figure number and tube size.

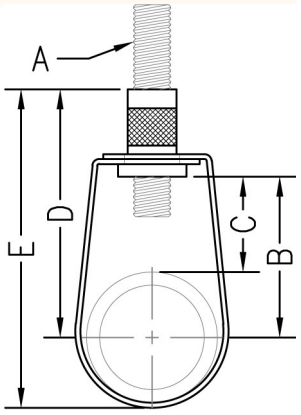

Tube Size		Rod Size	B		Adj. C		D		E		Max. Rec. Load		Wt. Each	
											lbs.	kN	lbs.	kg
1/2	(15)	3/8	1 13/16	(46.04)	1 1/2	(38.10)	2 11/16	(68.26)	3	(76.20)	300	(1.33)	.08	(.04)
3/4	(20)	3/8	1 5/8	(41.28)	1 3/16	(30.16)	2 1/2	(63.50)	2 15/16	(74.61)	300	(1.33)	.08	(.04)
1	(25)	3/8	1 9/16	(39.69)	1	(25.40)	2 9/16	(65.09)	3	(76.20)	300	(1.33)	.08	(.04)
1 1/4	(32)	3/8	1 5/8	(41.28)	15/16	(23.81)	2 1/2	(63.50)	3 3/16	(80.96)	300	(1.33)	.09	(.04)
1 1/2	(40)	3/8	1 11/16	(42.86)	7/8	(22.23)	2 9/16	(65.09)	3 3/8	(85.73)	300	(1.33)	.09	(.04)
2	(50)	3/8	2 7/16	(61.91)	1 3/8	(34.93)	3 5/16	(84.14)	4 3/8	(111.13)	300	(1.33)	.11	(.05)
2 1/2	(65)	3/8	2 13/16	(71.44)	1 1/2	(38.10)	3 7/8	(98.43)	5 9/16	(141.29)	525	(2.34)	.26	(.12)
3	(80)	3/8	3 1/8	(79.38)	1 9/16	(39.69)	4 3/16	(106.36)	5 3/4	(146.05)	525	(2.34)	.28	(.13)
3 1/2	(90)	3/8	3 1/2	(88.90)	1 11/16	(42.86)	4 9/16	(115.89)	6 3/8	(161.93)	525	(2.34)	.33	(.15)
4	(100)	3/8	3 3/4	(95.25)	1 11/16	(42.86)	4 13/16	(122.24)	6 15/16	(176.21)	650	(2.89)	.33	(.15)
5	(125)	1/2	4 1/8	(104.78)	1 9/16	(39.69)	5 3/16	(131.76)	7 13/16	(198.44)	1000	(4.45)	.56	(.25)
6	(150)	1/2	4 5/8	(117.48)	1 9/16	(39.69)	5 11/16	(144.46)	8 15/16	(227.01)	1000	(4.45)	.65	(.29)

Unless otherwise specified, all dimensions on drawings and in charts are in inches and dimensions shown in parentheses are in millimeters.