## Dimensional Document


# Viega PureFlow® Crimp

This document is subject to updates. For the most current Viega technical literature, please visit www.viega.us.

Viega products are designed to be installed by licensed and trained plumbing and mechanical professionals who are familiar with Viega products and their installation. **Installation by non–professionals may void Viega LLC's warranty.**


Zero Lead identifies Viega products meeting the lead free requirements of NSF/ANSI/CAN 61 through testing under NSF/ANSI/CAN 372 (0.25% or less maximum weighted average lead content).

### Viega PureFlow Crimp 90° Elbow Zero Lead PolyAlloy – Model V5216



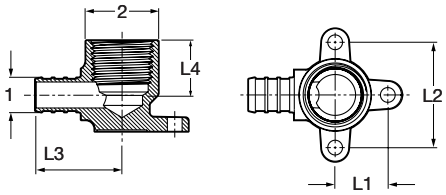

| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 43210 | ⅜ x ⅜ | 1.15 | 1⅛ | 1.15 | 1⅛ |
| 43220 | ½ x ½ | 1.15 | 1⅛ | 1.15 | 1⅛ |
| 43240 | ¾ x ¾ | 1.25 | 1¼ | 1.25 | 1¼ |
| 43242 | ¾ x ½ | 1.25 | 1¼ | 1.25 | 1¼ |
| 43260 | 1 x 1 | 1.53 | 1½ | 1.53 | 1½ |

### Viega PureFlow Crimp 90° Elbow Zero Lead Brass Crimp x MPT – Model V5014ZL





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 46822 | ⅜ x ⅜ MPT | 1.03 | 1 1/16 | 0.96 | 15/16 |
| 46232 | ½ x ⅜ MPT | 1.29 | 1 5/16 | 0.96 | 15/16 |
| 46821 | ½ x ½ MPT | 1.11 | 1⅛ | 1.19 | 1 3/16 |
| 46245 | ¾ x ¾ MPT | 1.50 | 1½ | 1.26 | 1¼ |

## Viega PureFlow Crimp 90° Elbow Drop Ear Zero Lead Brass Crimp x FPT – Model V5027ZL





| Part No. | Size (in) | L1 (in) | | L2 (in) | | L3 (in) | | L4 (in) | |
|---|---|---|---|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac |
| 46233 | ½ x ½ FPT | 0.79 | 13⁄16 | 1.58 | 1 9⁄16 | 1.39 | 1 3⁄8 | 0.72 | ¾ |
| 46244 | ¾ x ¾ FPT | 0.99 | 1 | 1.98 | 2 | 1.46 | 1 7⁄16 | 1.05 | 1 1⁄16 |

## Viega PureFlow Crimp 90° Elbow Zero Lead Copper Crimp x C – Model V5021





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 44305 | ⅜ x ½ C | 1.68 | 1 11⁄16 | 1.46 | 1 7⁄16 |
| 44325 | ½ x ½ C | 1.43 | 1 7⁄16 | 1.58 | 1 9⁄16 |
| 44345 | ¾ x ¾ C | 2.05 | 2 1⁄16 | 2.01 | 2 |

## Viega PureFlow Crimp 90° Elbow Zero Lead Copper Crimp x FTG – Model V5020





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 44302 | ⅜ x ½ FTG | 1.65 | 1 5⁄8 | 1.56 | 1 9⁄16 |
| 44320 | ½ x ½ FTG | 1.44 | 1 7⁄16 | 1.49 | 1 ½ |
| 44340 | ¾ x ¾ FTG | 1.94 | 1 15⁄16 | 1.87 | 1 7⁄8 |

## Viega PureFlow Crimp Tee Zero Lead PolyAlloy – Model V5218





| Part No. | Size (in) | L1 (in) | | L2 (in) | | L3 (in) | |
|---|---|---|---|---|---|---|---|
| | 1 2 3 | Dec | Frac | Dec | Frac | Dec | Frac |
| 43500 | ⅜ x ⅜ x ⅜ | 1.16 | 1 3⁄16 | 1.16 | 1 3⁄16 | 1.16 | 1 3⁄16 |
| 43520 | ½ x ½ x ½ | 1.15 | 1 1⁄8 | 1.15 | 1 1⁄8 | 1.15 | 1 1⁄8 |
| 43334 | ½ x ½ x ¾ | 1.25 | 1 ¼ | 1.25 | 1 ¼ | 1.15 | 1 1⁄8 |
| 43540 | ¾ x ¾ x ¾ | 1.25 | 1 ¼ | 1.25 | 1 ¼ | 1.25 | 1 ¼ |
| 43433 | ¾ x ½ x ½ | 1.25 | 1 ¼ | 1.15 | 1 1⁄8 | 1.25 | 1 ¼ |
| 43434 | ¾ x ½ x ¾ | 1.25 | 1 ¼ | 1.25 | 1 ¼ | 1.25 | 1 ¼ |
| 43443 | ¾ x ¾ x ½ | 1.15 | 1 1⁄8 | 1.15 | 1 1⁄8 | 1.25 | 1 ¼ |
| 43445 | ¾ x ¾ x 1 | 1.30 | 1 5⁄16 | 1.30 | 1 5⁄16 | 1.34 | 1 5⁄16 |
| 43544 | 1 x ¾ x ¾ | 1.37 | 1 3⁄8 | 1.36 | 1 3⁄8 | 1.36 | 1 3⁄8 |
| 43545 | 1 x ¾ x 1 | 1.54 | 1 9⁄16 | 1.39 | 1 3⁄8 | 1.54 | 1 9⁄16 |
| 43553 | 1 x 1 x ½ | 1.33 | 1 5⁄16 | 1.33 | 1 5⁄16 | 1.32 | 1 5⁄16 |
| 43554 | 1 x 1 x ¾ | 1.33 | 1 5⁄16 | 1.33 | 1 5⁄16 | 1.26 | 1 ¼ |
| 43560 | 1 x 1 x 1 | 1.53 | 1 ½ | 1.53 | 1 ½ | 1.53 | 1 ½ |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x MPT – Model V5011ZL





| Part No. | Size (in) 1 2 | L (in) Dec | L (in) Frac | WS (in) Dec | WS (in) Frac |
|---|---|---|---|---|---|
| 46302 | ⅜ x ½ MPT | 1.63 | 1⅝ | 0.88 | ⅞ |
| 46321 | ½ x ½ MPT | 1.65 | 1⅝ | 0.88 | ⅞ |
| 46324 | ½ x ¾ MPT | 1.84 | 1 13/16 | 1.06 | 1 1/16 |
| 46342 | ¾ x ½ MPT | 1.68 | 1 11/16 | 0.88 | ⅞ |
| 46340 | ¾ x ¾ MPT | 1.84 | 1 13/16 | 1.06 | 1 1/16 |
| 46446 | ¾ x 1 MPT | 2.07 | 2 1/16 | 1.38 | 1⅜ |
| 46361 | 1 x ¾ MPT | 2.02 | 2 | 1.06 | 1 1/16 |
| 46366 | 1 x 1 MPT | 2.25 | 2¼ | 1.38 | 1⅜ |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x FPT – Model V5012ZL





| Part No. | Size (in) 1 2 | L (in) Dec | L (in) Frac | WS (in) Dec | WS (in) Frac |
|---|---|---|---|---|---|
| 46323 | ⅜ x ½ FPT | 1.62 | 1⅝ | 1.00 | 1 |
| 46333 | ½ x ½ FPT | 1.62 | 1⅝ | 1.00 | 1 |
| 46334 | ½ x ¾ FPT | 1.67 | 1 11/16 | 1.25 | 1¼ |
| 46344 | ¾ x ¾ FPT | 1.67 | 1 11/16 | 1.25 | 1¼ |
| 46345 | ¾ x 1 FPT | 1.89 | 1⅞ | 1.50 | 1½ |
| 46355 | 1 x 1 FPT | 2.07 | 2 1/16 | 1.50 | 1½ |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x PB – Model V5017ZL





| Part No. | Size (in) 1 2 | L (in) Dec | L (in) Frac |
|---|---|---|---|
| 46620 | ⅜ x ⅜ PB | 1.37 | 1⅜ |
| 46630 | ½ x ½ PB | 1.37 | 1⅜ |
| 46145 | ¾ x ¾ PB | 1.94 | 1 15/16 |
| 46156 | 1 x 1 PB | 2.39 | 2⅜ |

## Viega PureFlow Crimp Adapter Zero Lead Crimp x PE – Model V5047ZL





| Part No. | Size (in) 1 2 | L (in) Dec | L (in) Frac |
|---|---|---|---|
| 46145 | ¾ x ¾ C | 1.94 | 1 15/16 |
| 46156 | 1 x 1 C | 2.39 | 2⅜ |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x C – Model V5045ZL



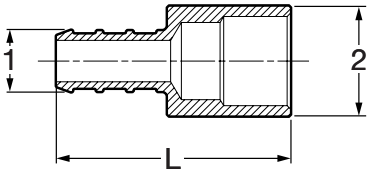

| Part No. | Size (in) 1 2 | L (in) Dec | L (in) Frac |
|---|---|---|---|
| 46635 | ½ x ½ C | 1.33 | 1 5/16 |
| 46645 | ¾ x ¾ C | 1.57 | 1 9/16 |
| 40655 | 1 x 1 C | 2.13 | 2⅛ |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x FTG – Model V5046ZL





| Part No. | Size (in) 1 2 | L (in) Dec | Frac |
|---|---|---|---|
| 46633 | ½ x ½ FTG | 1.33 | 1 5/16 |
| 46644 | ¾ x ¾ FTG | 1.50 | 1½ |
| 60651 | 1 x 1 FTG | 1.97 | 2 |

## Viega PureFlow Crimp Adapter Zero Lead Brass Crimp x FTG x C – Model V5024ZL





| Part No. | Size (in) 1 2 | L (in) Dec | Frac |
|---|---|---|---|
| 46621 | ⅜ x ⅜ FTG or ¼ C | 1.33 | 1 5/16 |
| 46622 | ⅜ x ½ FTG or ⅜ C | 1.33 | 1 5/16 |
| 46631 | ½ x ⅜ FTG or ¼ C | 1.46 | 1 7/16 |
| 46654 | 1 x 1 FTG or ¾ C | 1.92 | 1 15/16 |

## Viega PureFlow Crimp Zero Lead Coupling PolyAlloy – Model V5215



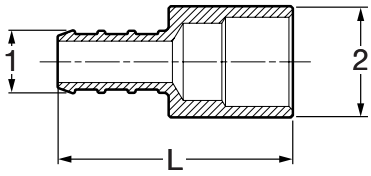

| Part No. | Size (in) 1 2 | L (in) Dec | Frac |
|---|---|---|---|
| 43402 | ⅜ x ⅜ | 1.52 | 1½ |
| 43403 | ½ x ½ | 1.50 | 1½ |
| 43332 | ½ x ⅜ | 1.52 | 1½ |
| 43343 | ¾ x ½ | 1.50 | 1½ |
| 43353 | 1 x ½ | 1.70 | 1 11/16 |
| 43404 | ¾ x ¾ | 1.50 | 1½ |
| 43354 | 1 x ¾ | 1.70 | 1 11/16 |
| 43355 | 1 x 1 | 1.82 | 1 13/16 |

## Viega PureFlow Crimp Test Plug Zero Lead PolyAlloy – Model V5058



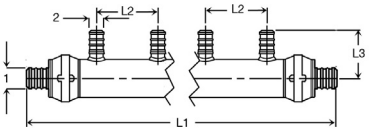

| Part No. | Size (in) 1 | L (in) Dec | Frac |
|---|---|---|---|
| 43702 | ⅜ | 0.76 | ¾ |
| 43723 | ½ | 0.76 | ¾ |
| 43744 | ¾ | 0.95 | 15/16 |
| 43765 | 1 | 1.13 | 1⅛ |

## Viega PureFlow Crimp Transition Coupling Zero Lead – Model 5013PZL



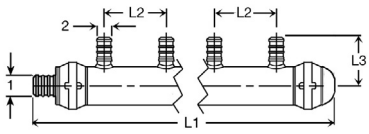

| Part No. | Size (in) 1 2 | L1 (in) Dec | Frac |
|---|---|---|---|
| 44350 | ½ C ½ P | 1.60 | 1⅝ |
| 44355 | ½ C x ¾ P | 1.81 | 13/16 |
| 44360 | ¾ C x ½ P | 1.65 | 1⅝ |
| 44365 | ¾ C x ¾ P | 1.72 | 1¾ |
| 44370 | 1 C x 1 P | 1.93 | 1 15/16 |

## Viega PureFlow Crimp Multi–port Tee Zero Lead PolyAlloy Flow Through – Model V5031.2



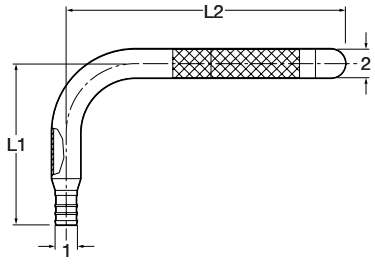

| Part No. | Size (in) 1 2 | Outlets | L1 (in) | | L2 (in) | | L3 (in) | |
|---|---|---|---|---|---|---|---|---|
| | | | Dec | Frac | Dec | Frac | Dec | Frac |
| 65152 | ¾ x ½ | 2 | 6.50 | 6½ | 2.00 | 2 | 1.55 | 1 9/16 |
| 65153 | ¾ x ½ | 3 | 8.50 | 8½ | 2.00 | 2 | 1.55 | 1 9/16 |
| 65154 | ¾ x ½ | 4 | 10.50 | 10½ | 2.00 | 2 | 1.55 | 1 9/16 |
| 65254 | 1 x ¾ x ½ | 4 | 10.60 | 10⅝ | 2.00 | 2 | 1.55 | 1 9/16 |
| 65256 | 1 x ½ | 6 | 14.80 | 14 13/16 | 2.00 | 2 | 1.55 | 1 9/16 |
| 65258 | 1 x ½ | 8 | 18.80 | 18 13/16 | 2.00 | 2 | 1.55 | 1 9/16 |

## Viega PureFlow Crimp Multi–port Tee Zero Lead PolyAlloy Closed – Model V5031.22



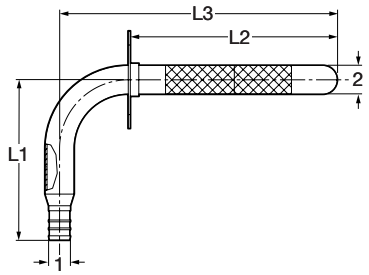

| Part No. | Size (in) 1 2 | Outlets | L1 (in) | | L2 (in) | | L3 (in) | |
|---|---|---|---|---|---|---|---|---|
| | | | Dec | Frac | Dec | Frac | Dec | Frac |
| 65104 | ¾ x ½ | 4 | 10.10 | 10⅛ | 2.00 | 2 | 1.55 | 1 9/16 |
| 65206 | 1 x ½ | 6 | 14.30 | 14 5/16 | 2.00 | 2 | 1.55 | 1 9/16 |

## Viega PureFlow Crimp Stub–Out 90° Elbow Zero Lead Copper Crimp x Street – Model V5070



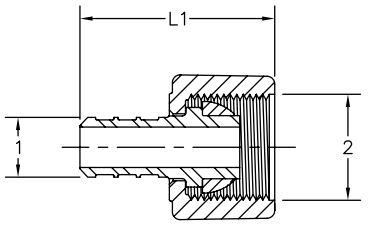

| Part No. | Size (in) 1 2 | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | | Dec | Frac | Dec | Frac |
| 44208 | ⅜ x ½ FTG | 3.50 | 3½ | 7.75 | 7¾ |
| 44226 | ½ x ½ FTG | 3.50 | 3½ | 5.75 | 5¾ |
| 44228 | ½ x ½ FTG | 3.50 | 3½ | 7.75 | 6¾ |
| 44240 | ¾ x ¾ FTG | 4.50 | 4½ | 8.00 | 8 |

## Viega PureFlow Crimp Stub–Out 90° Elbow Zero Lead Copper Crimp x Street with Wall Plate – Model V5070.1





| Part No. | Size (in) 1 2 | L1 (in) | | L2 (in) | | L3 (in) | |
|---|---|---|---|---|---|---|---|
| | | Dec | Frac | Dec | Frac | Dec | Frac |
| 44209 | ⅜ x ½ FTG | 3.50 | 3½ | 7.75 | 7¾ | 6.00 | 6 |
| 44227 | ½ x ½ FTG | 3.50 | 3½ | 5.75 | 5¾ | 4.00 | 4 |
| 44229 | ½ x ½ FTG | 3.50 | 3½ | 7.75 | 7¾ | 6.00 | 6 |

## Viega PureFlow Crimp Lav Adapter Zero Lead Brass Crimp x Lav – Model V5075ZL





| Part No. | Size (in) 1 2 | L (in) | |
|---|---|---|---|
| | | Dec | Frac |
| 46023 | ⅜ x ½ Lav (plastic nut) | 1.65 | 1⅝ |
| 46033 | ½ x ½ Lav (plastic nut) | 1.65 | 1⅝ |

## Viega PureFlow Crimp Lav Adapter Zero Lead Brass Crimp x CTS – Model V5077ZL





| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac | L2 (in) Dec | L2 (in) Frac |
|---|---|---|---|---|---|
| 46032 | ⅜ x ¼ CTS (⅜ OD) Comp | 1.76 | 1¾ | 0.63 | ⅝ |
| 46331 | ½ x ¼ CTS (⅜ OD) Comp | 1.76 | 1¾ | 0.63 | ⅝ |

## Viega PureFlow Crimp Lav Adapter Zero Lead PolyAlloy Crimp x Lav – Model V5263





| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac |
|---|---|---|---|
| 43323 | ⅜ x ½ Lav | 1.52 | 1½ |
| 43333 | ½ x ½ Lav | 1.46 | 1⁷⁄₁₆ |
| 43344 | ¾ x ¾ Lav | 1.62 | 1⅝ |

## Viega PureFlow Crimp Lav Adapter 90° Elbow Zero Lead PolyAlloy Crimp x Lav – Model V5255





| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac | L2 (in) Dec | L2 (in) Frac |
|---|---|---|---|---|---|
| 43232 | ⅜ x ½ Lav | 1.35 | 1⅜ | 1.15 | 1⅛ |
| 43233 | ½ x ½ Lav | 1.35 | 1⅜ | 1.15 | 1⅛ |
| 43244 | ¾ x ¾ Lav | 1.42 | 1⁷⁄₁₆ | 1.25 | 1¼ |

## Viega PureFlow Crimp Closet Adapter Zero Lead Brass Crimp x Closet – Model V5072ZL



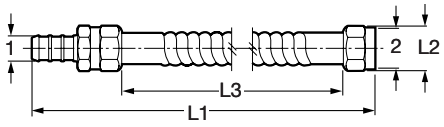

| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac | L2 (in) Dec | L2 (in) Frac |
|---|---|---|---|---|---|
| 46223 | ⅜ x ½ Closet (plastic nut) | 1.36 | 1⅜ | 1.16 | 1³⁄₁₆ |
| 46234 | ½ x ½ Closet (plastic nut) | 1.36 | 1⅜ | 1.16 | 1³⁄₁₆ |

## Viega PureFlow Crimp Closet Adapter Zero Lead PolyAlloy Crimp x Closet – Model V5257



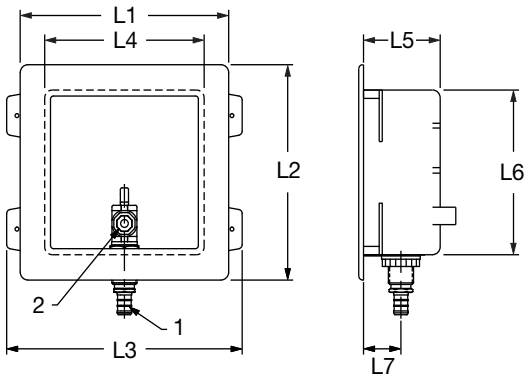

| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac |
|---|---|---|---|
| 43300 | ⅜ x ½ Closet | 1.60 | 1⅝ |
| 43320 | ½ x ½ Closet | 1.60 | 1⅝ |

## Viega PureFlow Crimp Swivel Connector Zero Lead Copper For Water Heater Crimp x FPT – Model V5048ZL




| Part No. | Size (in) 1 2 | L1 (in) | | L2 (in) | | L3 (in) | |
|---|---|---|---|---|---|---|---|
| | | Dec | Frac | Dec | Frac | Dec | Frac |
| 46764 | ¾ x ¾ FPT | 19.00 | 19 | 1.13 | 1⅛ | 18.00 | 18 |

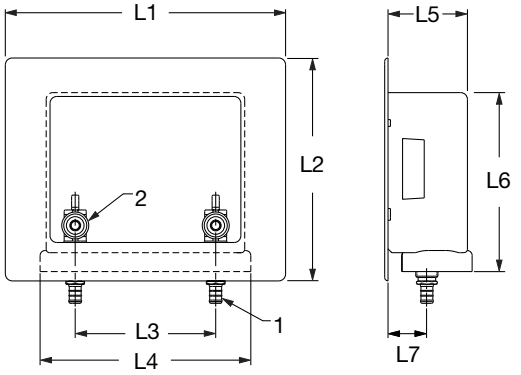
## Viega PureFlow Crimp Outlet Box Zero Lead Brass For Ice Maker ¼ Turn – Models 2872.8ZL and V5073




| Part No. | Size (in) 1 2 | L1 (in) | | L2 (in) | | L3 (in) | | L4 (in) | | L5 (in) | | L6 (in) | | L7 (in) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac |
| 46710* | ⅜ x ⅛ CTS (¼ O.D.) | 6.80 | 6 13/16 | 6.80 | 6 13/16 | 7.68 | 7 11/16 | 5.20 | 5 3/16 | 2.50 | 2½ | 5.20 | 5 3/16 | 1.22 | 1¼ |
| 46720* | ½ x ⅛ CTS (¼ O.D.) | 6.80 | 6 13/16 | 6.80 | 6 13/16 | 7.68 | 7 11/16 | 5.20 | 5 3/16 | 2.50 | 2½ | 5.20 | 5 3/16 | 1.22 | 1¼ |
| 43700 | ⅜ x ⅛ CTS (¼ O.D.) | 6.80 | 6 13/16 | 6.80 | 6 13/16 | 7.68 | 7 11/16 | 5.20 | 5 3/16 | 2.50 | 2½ | 5.20 | 5 3/16 | 1.22 | 1¼ |
| 43722 | ½ x ⅛ CTS (¼ O.D.) | 6.80 | 6 13/16 | 6.80 | 6 13/16 | 7.68 | 7 11/16 | 5.20 | 5 3/16 | 2.50 | 2½ | 5.20 | 5 3/16 | 1.22 | 1¼ |

** with hammer arrestor*


## Viega PureFlow Crimp Outlet Box Zero Lead Brass For Washing Machine ¼ Turn – Models 2872.9ZL and V5073.5




| Part No. | Size (in) 1 2 | L1 (in) | | L2 (in) | | L3 (in) | | L4 (in) | | L5 (in) | | L6 (in) | | L7 (in) | |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac |
| 46730* | ½ x ¾ Hose | 10.40 | 10⅜ | 8.30 | 8 5/16 | 5.20 | 5 3/16 | 7.40 | 7⅜ | 2.90 | 2⅞ | 6.60 | 6⅝ | 1.43 | 1 7/16 |
| 43720 | ½ x ¾ Hose | 10.40 | 10⅜ | 8.30 | 8 5/16 | 5.20 | 5 3/16 | 7.40 | 7⅜ | 2.90 | 2⅞ | 6.60 | 6⅝ | 1.43 | 1 7/16 |

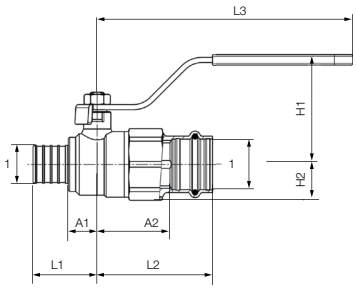
** with hammer arrestor*

## Viega PureFlow Crimp Ring Copper – Model V5019.9





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 | Dec | Frac | Dec | Frac |
| 43600 | ⅜ SDR9 | 0.32 | 5/16 | 0.05 | 1/16 |
| 43620 | ½ SDR9 | 0.32 | 5/16 | 0.05 | 1/16 |
| 43640 | ¾ SDR9 | 0.32 | 5/16 | 0.05 | 1/16 |
| 43660 | 1 SDR9 | 0.36 | ⅜ | 0.04 | 1/16 |

## Viega PureFlow PureFlow Crimp x ProPress Ball Valve – Model 2882.2ZL



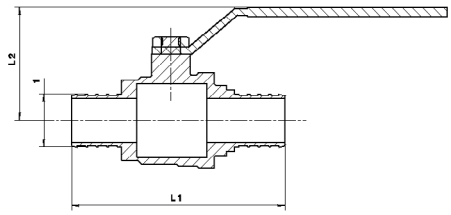

| Part No. | Size (in) | H1 (in) | | H2 (in) | | L1 (in) | | L2 (in) | | L3 (in) | | A1 (in) | | A2 (in) | | Cv (US gal/min) |
|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|---|
| | 1 | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | Dec | Frac | |
| 87890 | ½ | 1.93 | 1 15/16 | 0.55 | 9/16 | 1.06 | 1 1/16 | 2.01 | 2 | 4.61 | 4 5/8 | 0.43 | 1/16 | 1.18 | 1 3/16 | 6.05 |
| 87885 | ¾ | 1.97 | 2 | 0.67 | 11/16 | 1.14 | 1 1/8 | 2.28 | 2 1/4 | 4.61 | 4 5/8 | 0.51 | ½ | 1.38 | 1 3/8 | 13.5 |
| 87895 | 1 | 2.48 | 2 ½ | 0.83 | 13/16 | 1.46 | 1 7/16 | 2.60 | 2 5/8 | 5.79 | 5 13/16 | 0.67 | 11/16 | 1.69 | 1 11/16 | 22.3 |

## Viega PureFlow Crimp Ball Valve Zero Lead Brass ¼ Turn – Model V5037ZL





| Part No. | Size (in) | | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|---|
| | 1 | 1 | Dec | Frac | Dec | Frac |
| 46031 | ½ x ½ | | 2.76 | 2¾ | 1.21 | 1 3/16 |
| 46044 | ¾ x ¾ | | 2.95 | 2 15/16 | 1.31 | 1 5/16 |

## Viega PureFlow Crimp Ball Valve Zero Lead Brass 1–inch Turn – Model V5037ZL





| Part No. | Size (in) | | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|---|
| | 1 | 1 | Dec | Frac | Dec | Frac |
| 46060 | 1 x 1 | | 3.41 | 3 7/16 | 1.84 | 1 13/16 |

## Viega PureFlow Crimp Ball Valve Zero Lead Chrome Plated Brass ¼ Turn – Model V5023ZL





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 | Dec | Frac | Dec | Frac |
| 46021 | ½ | 2.76 | 2¾ | 1.20 | 1³⁄₁₆ |

## Viega PureFlow Crimp Valve Zero Lead PolyAlloy ¼ Turn – Model V5236





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 | Dec | Frac | Dec | Frac |
| 43030 | ½ | 2.83 | 2¹³⁄₁₆ | 1.45 | 1⁷⁄₁₆ |
| 43040 | ¾ | 3.00 | 3 | 1.45 | 1⁷⁄₁₆ |

## Viega PureFlow Crimp Stop Valve Straight Zero Lead Chrome Plated Brass Crimp x CTS ¼ Turn – Model V5026ZL





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 46001 | ⅜ x ¼ CTS (⅜ OD) Comp | 2.78 | 2¾ | 1.20 | 1³⁄₁₆ |
| 46022 | ½ x ¼ CTS (⅜ OD) Comp | 2.78 | 2¾ | 1.20 | 1³⁄₁₆ |

## Viega PureFlow Crimp Stop Valve Angled Zero Lead Chrome Plated Brass Crimp x CTS ¼ Turn – Model V5064ZL





| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 46002 | ⅜ x ¼ CTS (⅜ OD) Comp | 2.70 | 2¹¹⁄₁₆ | 1.03 | 1 |
| 46025 | ½ x ¼ CTS (⅜ OD) Comp | 2.80 | 2¹³⁄₁₆ | 1.03 | 1 |

## Viega PureFlow Crimp Stop Valve Straight Zero Lead PolyAlloy Crimp x Lav ¼Turn – Model V5036.30




| Part No. | Size (in) | L1 (in) | | L2 (in) | |
|---|---|---|---|---|---|
| | 1 2 | Dec | Frac | Dec | Frac |
| 43023 | ⅜ x ½ Lav | 3.00 | 3 | 1.45 | 1⁷⁄₁₆ |

## Viega PureFlow Crimp Stop Valve Straight Zero Lead PolyAlloy Crimp x Closet ¼ Turn – Model V5036.31




| Part No. | Size (in) 1 2 | L1 (in) Dec | L1 (in) Frac | L2 (in) Dec | L2 (in) Frac |
|---|---|---|---|---|---|
| 43002 | ⅜ x ½ Closet | 3.00 | 3 | 1.45 | 1 7/16 |
| 43003 | ½ x ½ Closet | 3.00 | 3 | 1.45 | 1 7/16 |

**Viega LLC**
585 Interlocken Blvd.
Broomfield, CO 80021

Phone (800) 976-9819
www.viega.us