SUBMITTAL SHEET

www.mspipe.kr


Job Name: Contractor:

Location: Quantity:

Engineer: Date:

Steel Pipe Super Flow

Features

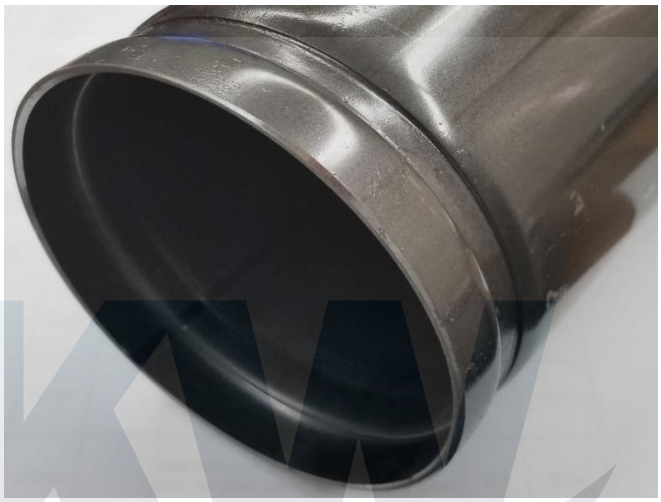

* Manufactured According to ASTM A795
* ERW, Grade A, Type E
* Meets NFPA 13
* Plain Ends or Grooved Ends
* Corrosion Resistant Surface
* Mill Lacquer Coated
* 300 PSI Rated
* UL List & FM Approved

Specification

Pipe Mill: MS Pipe
Country of Origin: South Korea
Nominal Pipe Size: 1-1/4" to 4"
Length: 21 Feet

			Empty	WFW**		
Size	**O.D.**	**I.D.**	**Lbs/Ft**	**Lbs/Ft**	**Pcs/Lft**	**CRR***
1-1/4"	1.660"	1.494"	1.399	2.194	61	3.70
1-1/2"	1.900"	1.710"	1.833	2.875	61	4.42
2"	2.375"	2.185"	2.315	4.016	37	3.58
2-1/2"	2.875"	2.709"	2.477	5.092	30	1.37
3"	3.500"	3.320"	3.281	7.207	19	1.27
4"	4.500"	4.298"	4.750	11.330	19	1.10

*CRR=Corrosion Resistance Ratio Calculated Using UL CRR Formula Under UL Category VIZY.
This Ratio Value Is Used to Measure the Ability of A Pipe to Withstand Corrosion.

**WFW=Water Filled Weight

AKW Supply Co. product specifications and dimensions are approximate and are provided for reference only. It's the user's responsibility to observe and adapt such precautions as may be advisable for the protection of personnel and property in the handling and use of our products. AKW Supply Co. reserves the right to change or modify product design, construction, specification, model number or material without prior notice and without incurring any obligation to make such changes on AKW Supply Co. previously sold.