
Location: _____

MIFAB® R1100-RS


ROOF DECK CONDENSATE RECEPTOR DRAIN

Specification: MIFAB® Series R1100-RS lacquered cast iron roof deck condensate receptor drain with anchor flange, cast iron waterproofing membrane clamp ring with integral gravel stop, overflow and cast iron dome strainer.

Function: Used in flat roofs and gutters to receive condensate and wastewater from air conditioners, cooling towers and other mechanical equipment. The 2" high external dam prevents storm water from entering the drain line and the dome strainer prevents debris from entering the drain line. The 8" diameter body is ideal for applications with limited space. Anchor flange and membrane clamp with tongue in groove design provides for secure grip of membrane and roof flashing materials.

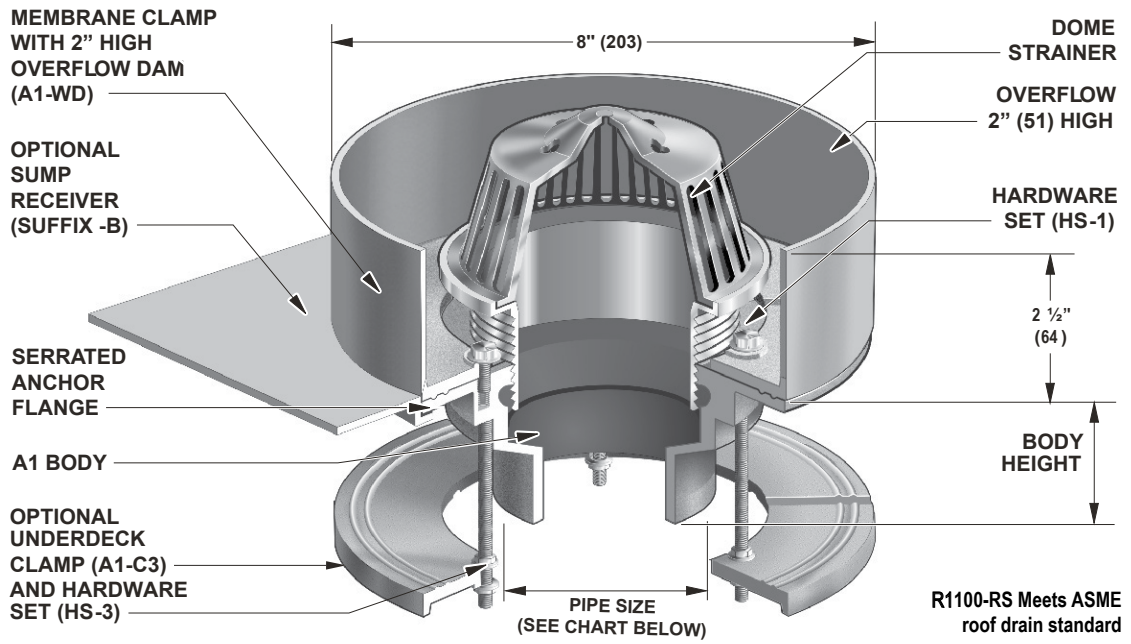

PARTS:


A1 BODY


K-50


A1-WD



PIPE SIZE	BODY HEIGHT				
	NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC (-30) / ABS (-31)
○ 2" (51)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 1/4" (57)	☐ 3 3/4" (95)	☐ 2 5/8" (67)
○ 3" (76)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 1/4" (83)
○ 4" (102)	☐ 3" (76)	☐ 3 3/8" (86)	☐ 2 5/8" (67)	☐ 3 3/4" (95)	☐ 3 1/2" (89)

Note: See the MIFAB R1200 or R1220 Series for 6" outlet connection roof drains.

	Suffix	Description
☐	**-1**	Nickel bronze (veneer)
☐	**-3**	Stainless steel (veneer)
☐	**-6**	Vandal proof
☐	**-11**	Acid resistant epoxy coating
☐	**-12**	Galvanized metal dome
☐	**-12A**	Galvanized body and membrane clamp
☐	**-13**	Galvanized body, membrane clamp and dome
☐	**-14**	Flat grate (replaces dome strainer)
☐	**-15**	Adjustable extension
☐	**-28**	Stainless steel body (Type 304) (2", 3", 4")
☐	**-30**	PVC socket connection body
☐	**-31**	ABS socket connection body
☐	**-81**	Rough bronze dome (A1-MD-81) (to poly dome)
☐	**-83**	Stainless steel mesh screen over metal dome

☐	**-90**	Threaded side outlet (2",3",4")
☐	**-90NH**	No Hub side outlet (cast iron only) (2", 3", 4")
☐	**(Standard)**	No hub outlet
☐	**-B**	Sump receiver
☐	**-BA**	Buy America Act compliant product
☐	**P**	Push on outlet
☐	**-PSA**	Pennsylvania Steel Act compliant product
☐	**T**	Threaded outlet (2",3",4")
☐	**-U**	Underdeck clamp
☐	**-U3**	Underdeck clamp with cutaway side
☐	**-W-1**	Water proofing flange
☐	**X**	Inside caulk outlet (2",3",4")
☐	**-XJ**	Vertical expansion joint (see R1900)
☐	**-Z**	Extended wide elastomeric flange

CALIFORNIA PROPOSITION 65 WARNING. This product contains chemicals known to the State of California to cause cancer and birth defects or other reproductive harm.

Job Name: _____ Page No: _____

Section No: _____ Contractor: _____

Schedule No: _____ Purchase Order No: _____

MIFAB® *reserves the right to make changes in material and design without formal notice and obligation.*

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880